

Copper Conductor PVC Insulated and PVC Sheathed Armoured Power Cable

Cu/PVC/SWA/PVC 0.6/1 kV (NYRGbY)

Specification :
SNI IEC 60502-1 : 2009



Constructions:

Conductor

Annealed plain copper round solid or round circular stranded according to SNI IEC 60228

Insulation

Extruded layer of Polyvinyl Chloride (PVC) complied with SNI IEC 60502-1

Colour :

- Light Blue, Brown



Inner Covering / filler

Extruded Polyvinyl Chloride (PVC), Black colour

Armour

A layers of Galvanized round steel wires with a counter helix layer of galvanized steel tape.

Outer Sheath

The Outer Sheath shall be a layer of Extruded Polyvinyl Chloride (PVC) Grade ST1 to SNI IEC 60502-1. Black colour.

Applications:

For general purpose power distribution in dry or wet location, best suitable for direct burying in ground.

Special Features on Request :

- Fire Resistance • Flame Retardant Cat. A/B/C • Oil Resistance
- UV Resistance • Anti termite • Anti rodent • Low Smoke Zero Halogen

Note : [re] Round solid conductor
[rm] Circular stranded conductor

Packing : [D] Drum

No. of Cores and Cross Section	Nominal Thickness		Overall Diameter (approx)	Weight of Cable (approx)	Min. Insulation DC Resistance at 20°	Current Carrying Capacity at 30°C		Short Circuit Current Capacity at 1.0 second	Standard Delivery Length
	Insulation	Outer Sheath				In Ground	In Air		
sq.mm	mm	mm	mm	kg/km	M.Ohm.km	A	A	kA	m
2 x 1.5 re	0.8	1.8	13.9	374	12	27	21	0.17	1000/D
2 x 1.5 rm	0.8	1.8	14.3	375	11	27	21	0.17	1000/D
2 x 2.5 re	0.8	1.8	14.6	406	10	36	29	0.29	1000/D
2 x 2.5 rm	0.8	1.8	15.2	430	9	36	29	0.29	1000/D
2 x 4 re	1.0	1.8	16.4	503	10	47	38	0.46	1000/D
2 x 4 rm	1.0	1.8	17	536	9	47	38	0.46	1000/D
2 x 6 re	1.0	1.8	18	674	9	59	48	0.69	1000/D
2 x 6 rm	1.0	1.8	18.9	734	8	59	48	0.69	1000/D
2 x 10 re	1.0	1.8	20.1	781	7	78	66	1.15	1000/D
2 x 10 rm	1.0	1.8	20.8	908	6	78	66	1.15	1000/D
2 x 16 rm	1.0	1.8	23.4	1296	5	102	90	1.84	1000/D
2 x 25 rm	1.2	1.8	26.6	1688	5	134	120	2.88	1000/D
2 x 35 rm	1.2	1.8	28.9	2030	4	160	150	4.03	1000/D
2 x 50 rm	1.4	1.9	33.6	2812	4	187	180	5.75	1000/D
2 x 70 rm	1.4	2.0	36.8	3430	4	230	230	8.05	1000/D
2 x 95 rm	1.6	2.1	42.2	4470	4	280	275	10.93	1000/D
2 x 120 rm	1.6	2.2	46.5	5648	3	320	320	13.80	1000/D
2 x 150 rm	1.8	2.3	50.6	6650	3	355	375	17.25	500/D
2 x 185 rm	2.0	2.5	55.8	8007	3	409	430	21.28	500/D
2 x 240 rm	2.2	2.7	62.2	9952	3	472	510	27.60	500/D
2 x 300 rm	2.4	2.8	58.5	11918	3	525	590	34.50	500/D

Copper Conductor PVC Insulated and PVC Sheathed Armoured Power Cable

Cu/PVC/SWA/PVC 0.6/1 kV (NYRGbY)



Specification :
SNI IEC 60502-1 : 2009

Constructions:

Conductor

Annealed plain copper round solid or round circular stranded according to SNI IEC 60228

Insulation

Extruded layer of Polyvinyl Chloride (PVC) complied with SNI IEC 60502-1

Colour :

- Yellow Strip Green, Light Blue and Brown
- Brown, Black And Grey



Inner Covering / filler

Extruded Polyvinyl Chloride (PVC), Black colour

Armour

layers of Galvanized round steel wires with a counter helix layer of galvanized steel tape.

Outer Sheath

The Outer Sheath shall be a layer of Extruded Polyvinyl Chloride (PVC) Grade ST1 to SNI IEC 60502-1. Black colour.

Applications:

For general purpose power distribution in dry or wet location, best suitable for direct burying in ground.

Special Features on Request :

- Fire Resistance • Flame Retardant Cat. A/B/C • Oil Resistance
- UV Resistance • Anti termite • Anti rodent • Low Smoke Zero Halogen

Note : [re] Round solid conductor
[rm] Circular stranded conductor
[Sm] Sector shape conductor

Packing : [D] Drum

No. of Cores and Cross Section	Nominal Thickness		Overall Diameter (approx)	Weight of Cable (approx)	Min. Insulation DC Resistance at 20°	Current Carrying Capacity at 30°C		Short Circuit Current Capacity at 1.0 second	Standard Delivery Length
	Insulation	Outer Sheath				In Ground	In Air		
sq.mm	mm	mm	mm	kg/km	M.Ohm.km	A	A	kA	m
3 x 1.5 re	0.8	1.8	14.3	390	12	24	18	0.17	1000/D
3 x 1.5 rm	0.8	1.8	14.8	410	11	24	18	0.17	1000/D
3 x 2.5 re	0.8	1.8	15.2	451	10	32	25	0.29	1000/D
3 x 2.5 rm	0.8	1.8	15.8	479	9	32	25	0.29	1000/D
3 x 4 re	1.0	1.8	17.8	655	10	41	34	0.46	1000/D
3 x 4 rm	1.0	1.8	18.5	699	9	41	34	0.46	1000/D
3 x 6 re	1.0	1.8	18.8	762	9	52	44	0.69	1000/D
3 x 6 rm	1.0	1.8	19.7	819	8	52	44	0.69	1000/D
3 x 10 re	1.0	1.8	21.1	1025	7	69	60	1.15	1000/D
3 x 10 rm	1.0	1.8	21.8	1044	6	69	60	1.15	1000/D
3 x 16 rm	1.0	1.8	24.5	1416	5	89	80	1.84	1000/D
3 x 25 rm	1.2	1.8	28.1	1894	5	116	105	2.88	1000/D
3 x 35 rm	1.2	1.8	30.5	2321	4	138	130	4.03	1000/D
3 x 50 sm	1.4	1.9	32.7	2784	4	165	160	5.75	1000/D
3 x 70 sm	1.4	2.0	36.7	3806	4	205	200	8.05	1000/D
3 x 95 sm	1.6	2.2	41	4882	4	245	245	10.93	1000/D
3 x 120 sm	1.6	2.3	43.7	5853	3	285	285	13.80	1000/D
3 x 150 sm	1.8	2.4	48.9	7407	3	315	325	17.25	500/D
3 x 185 sm	2.0	2.6	52.5	8774	3	355	370	21.28	500/D
3 x 240 sm	2.2	2.8	57.9	11036	3	415	435	27.60	500/D
3 x 300 sm	2.4	3.0	62.5	13137	3	465	500	34.50	500/D

Copper Conductor PVC Insulated and PVC Sheathed Armoured Power Cable

Cu/PVC/SWA/PVC 0.6/1 kV (NYRGbY)

Specification :
SNI IEC 60502-1 : 2009



Constructions:

Conductor

Annealed plain copper round solid or round circular stranded according to SNI IEC 60228

Insulation

Extruded layer of Polyvinyl Chloride (PVC) complied with SNI IEC 60502-1

Colour :

- Yellow Strip Green, Brown, Black and Grey
- Light Blue, Brown, Black and Grey



Inner Covering / filler

Extruded Polyvinyl Chloride (PVC), Black colour

Armour

A layers of Galvanized round steel wires with a counter helix layer of galvanized steel tape.

Outer Sheath

The Outer Sheath shall be a layer of Extruded Polyvinyl Chloride (PVC) Grade ST1 to SNI IEC 60502-1. Black colour.

Applications:

For general purpose power distribution in dry or wet location, best suitable for direct burying in ground.

Special Features on Request :

- Fire Resistance • Flame Retardant Cat. A/B/C • Oil Resistance
- UV Resistance • Anti termite • Anti rodent • Low Smoke Zero Halogen

Note : [re] Round solid conductor
[rm] Circular stranded conductor
[Sm] Sector shape conductor

Packing : [D] Drum

No. of Cores and Cross Section	Nominal Thickness		Overall Diameter (approx)	Weight of Cable (approx)	Min. Insulation DC Resistance at 20°	Current Carrying Capacity at 30°C		Short Circuit Current Capacity at 1.0 second	Standard Delivery Length
	Insulation	Outer Sheath				In Ground	In Air		
sq.mm	mm	mm	mm	kg/km	M.Ohm.km	A	A	kA	m
4 x 1.5 re	0.8	1.8	15.2	433	12	24	18	0.17	1000/D
4 x 1.5 rm	0.8	1.8	15.6	455	11	24	18	0.17	1000/D
4 x 2.5 re	0.8	1.8	16	515	10	32	25	0.29	1000/D
4 x 2.5 rm	0.8	1.8	16.7	538	9	32	25	0.29	1000/D
4 x 4 re	1.0	1.8	18.8	740	10	41	34	0.46	1000/D
4 x 4 rm	1.0	1.8	19.7	790	9	41	34	0.46	1000/D
4 x 6 re	1.0	1.8	20.8	870	9	52	44	0.69	1000/D
4 x 6 rm	1.0	1.8	21	925	8	52	44	0.69	1000/D
4 x 10 re	1.0	1.8	23.6	1298	7	69	60	1.15	1000/D
4 x 10 rm	1.0	1.8	24	1317	6	69	60	1.15	1000/D
4 x 16 rm	1.0	1.8	26.3	1548	5	89	80	1.84	1000/D
4 x 25 rm	1.2	1.8	30.4	2241	5	116	105	2.88	1000/D
4 x 35 rm	1.2	1.9	32.9	2933	4	138	130	4.03	1000/D
4 x 50 sm	1.4	2.0	33.9	2934	4	165	160	5.75	1000/D
4 x 70 sm	1.4	2.1	38.7	4148	4	205	200	8.05	1000/D
4 x 95 sm	1.6	2.3	43.9	5489	4	245	245	10.93	1000/D
4 x 120 sm	1.6	2.4	48.2	7163	3	285	285	13.80	1000/D
4 x 150 sm	1.8	2.6	52.5	8637	3	315	325	17.25	500/D
4 x 185 sm	2.0	2.8	57.2	10354	3	355	370	21.28	500/D
4 x 240 sm	2.2	3.0	64.3	13347	3	415	435	27.60	500/D
4 x 300 sm	2.4	3.2	72.5	16702	3	465	500	34.50	500/D

Copper Conductor PVC Insulated and PVC Sheathed Armoured Power Cable

Cu/PVC/SWA/PVC 0.6/1 kV (NYRGbY)



Specification :
SNI IEC 60502-1 : 2009

Constructions:

Conductor

Annealed plain copper round solid or round circular stranded according to SNI IEC 60228

Insulation

Extruded layer of Polyvinyl Chloride (PVC) complied with SNI IEC 60502-1

Colour :

- Yellow Strip Green, Light Blue, Brown, Black and Grey



Inner Covering / filler

Extruded Polyvinyl Chloride (PVC), Black colour

Armour

A layers of Galvanized round steel wires with a counter helix layer of galvanized steel tape.

Outer Sheath

The Outer Sheath shall be a layer of Extruded Polyvinyl Chloride (PVC) Grade ST1 to SNI IEC 60502-1. Black colour.

Applications:

For general purpose power distribution in dry or wet location, best suitable for direct burying in ground.

Special Features on Request :

- Fire Resistance • Flame Retardant Cat. A/B/C • Oil Resistance
- UV Resistance • Anti termite • Anti rodent • Low Smoke Zero Halogen

Note : [re] Round solid conductor
[rm] Circular stranded conductor


Packing : [D] Drum

No. of Cores and Cross Section	Nominal Thickness		Overall Diameter (approx)	Weight of Cable (approx)	Min. Insulation DC Resistance at 20°	Current Carrying Capacity at 30°C		Short Circuit Current Capacity at 1.0 second	Standard Delivery Length
	Insulation	Outer Sheath				In Ground	In Air		
sq.mm	mm	mm	mm	kg/km	M.Ohm.km	A	A	kA	m
5 x 1.5 re	0.8	1.8	16	484	12	24	18	0.17	1000/D
5 x 1.5 rm	0.8	1.8	16.5	509	11	24	18	0.17	1000/D
5 x 2.5 re	0.8	1.8	17.7	647	10	32	25	0.29	1000/D
5 x 2.5 rm	0.8	1.8	18.5	687	9	32	25	0.29	1000/D
5 x 4 re	1.0	1.8	20	839	10	41	34	0.46	1000/D
5 x 4 rm	1.0	1.8	21	897	9	41	34	0.46	1000/D
5 x 6 re	1.0	1.8	21.4	996	9	52	44	0.69	1000/D
5 x 6 rm	1.0	1.8	22.5	1069	8	52	44	0.69	1000/D
5 x 10 re	1.0	1.8	25	1502	7	69	60	1.15	1000/D
5 x 10 rm	1.0	1.8	25.7	1527	6	69	60	1.15	1000/D
5 x 16 rm	1.0	1.8	28.3	1928	5	89	80	1.84	1000/D
5 x 25 rm	1.2	1.9	33.2	2641	5	116	105	2.96	1000/D
5 x 35 rm	1.2	2.0	37.4	3520	4	138	130	4.03	1000/D
5 x 50 rm	1.4	2.1	43	4921	4	165	160	5.75	1000/D

Copper Conductor PVC Insulated and PVC Sheathed Armoured Control Cable

Cu/PVC/SWA/PVC 0.6/1 kV (NYRGbY)

Specification :
SNI IEC 60502-1 : 2009

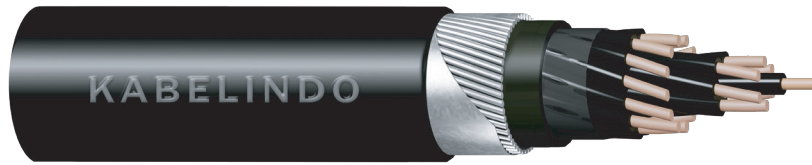

Constructions:

Conductor

Annealed plain copper round solid or round circular stranded according to SNI IEC 60228

Insulation

Extruded layer of Polyvinyl Chloride (PVC) complied with SNI IEC 60502-1

Colour :

- Black, with White printed number



Inner Covering / filler

Extruded Polyvinyl Chloride (PVC), Black colour

Armour

A layers of Galvanized round steel wires with a counter helix layer of galvanized steel tape.

Outer Sheath

The Outer Sheath shall be a layer of Extruded Polyvinyl Chloride (PVC) Grade ST1 to SNI IEC 60502-1. Black colour.

Applications:

For general purpose power distribution in dry or wet location, best suitable for direct burying in ground..

Special Features on Request :

- Fire Resistance • Flame Retardant Cat. A/B/C • Oil Resistance
- UV Resistance • Anti termite • Anti rodent • Low Smoke Zero Halogen


Note : [re] Round solid conductor
[rm] Circular stranded conductor

Packing : [D] Drum

No. of Cores and Cross Section	Nominal Thickness		Overall Diameter (approx)	Weight of Cable (approx)	Min. Insulation DC Resistance at 20°	Current Carrying Capacity at 30°C		Short Circuit Current Capacity at 1.0 second	Standard Delivery Length
	Insulation	Outer Sheath				In Ground	In Air		
sq.mm	mm	mm	mm	kg/km	M.Ohm.km	A	A	kA	m
7 x 1.5 re	0.8	1.8	18.6	727	12	17	13	0.17	1000/D
7 x 1.5 rm	0.8	1.8	19.2	777	11	17	13	0.17	1000/D
8 x 1.5 re	0.8	1.8	19.7	792	12	16	12	0.17	1000/D
8 x 1.5 rm	0.8	1.8	20.3	848	11	16	12	0.17	1000/D
10 x 1.5 re	0.8	1.8	21.7	929	12	15	11	0.17	1000/D
10 x 1.5 rm	0.8	1.8	22.6	997	11	15	11	0.17	1000/D
12 x 1.5 re	0.8	1.8	23	1117	12	14	11	0.17	1000/D
12 x 1.5 rm	0.8	1.8	23.8	1199	11	14	11	0.17	1000/D
14 x 1.5 re	0.8	1.8	24	1197	12	13	10	0.17	1000/D
14 x 1.5 rm	0.8	1.8	24.7	1287	11	13	10	0.17	1000/D
16 x 1.5 re	0.8	1.8	25	1310	12	12	10	0.17	1000/D
16 x 1.5 rm	0.8	1.8	25.6	1382	11	12	10	0.17	1000/D
19 x 1.5 re	0.8	1.8	26	1391	12	12	9	0.17	1000/D
19 x 1.5 rm	0.8	1.8	26.6	1504	11	12	9	0.17	1000/D
21 x 1.5 re	0.8	1.8	27	1496	12	11	9	0.17	1000/D
21 x 1.5 rm	0.8	1.8	27.7	1611	11	11	9	0.17	1000/D
24 x 1.5 re	0.8	1.8	28.2	1629	12	11	8	0.17	1000/D
24 x 1.5 rm	0.8	1.8	29.3	1766	11	11	8	0.17	1000/D
30 x 1.5 re	0.8	1.8	30	1857	12	11	8	0.17	1000/D
30 x 1.5 rm	0.8	1.8	31.4	2020	11	11	8	0.17	1000/D
40 x 1.5 re	0.8	1.9	33.7	2420	12	11	8	0.17	1000/D
40 x 1.5 rm	0.8	1.9	35.2	2635	11	11	8	0.17	1000/D
52 x 1.5 re	0.8	2.1	37.6	2932	12	11	8	0.17	1000/D
52 x 1.5 rm	0.8	2.1	39.3	3190	11	11	8	0.17	1000/D
61 x 1.5 re	0.8	2.1	39.5	3215	12	11	8	0.17	1000/D
61 x 1.5 rm	0.8	2.1	41.3	3518	11	11	8	0.17	1000/D

Copper Conductor PVC Insulated and PVC Sheathed Armoured Control Cable

Cu/PVC/SWA/PVC 0.6/1 kV (NYRGbY)

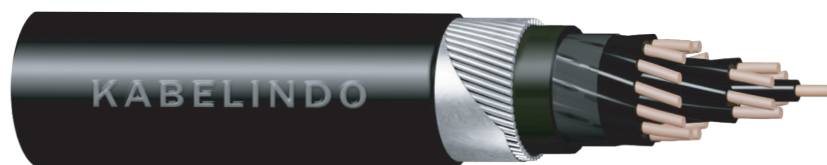

Specification :
SNI IEC 60502-1 : 2009

Constructions:

Conductor

Annealed plain copper round solid or round circular stranded according to SNI IEC 60228

Insulation

Extruded layer of Polyvinyl Chloride (PVC) complied with SNI IEC 60502-1

Colour :

- Black, with White printed number



Inner Covering / filler

Extruded Polyvinyl Chloride (PVC), Black colour

Armour

A layers of Galvanized round steel wires with a counter helix layer of galvanized steel tape.

Outer Sheath

The Outer Sheath shall be a layer of Extruded Polyvinyl Chloride (PVC) Grade ST1 to SNI IEC 60502-1. Black colour.

Applications:

For general purpose power distribution in dry or wet location, best suitable for direct burying in ground.

Special Features on Request :

- Fire Resistance • Flame Retardant Cat. A/B/C • Oil Resistance
- UV Resistance • Anti termite • Anti rodent • Low Smoke Zero Halogen

Note : [re] Round solid conductor
[rm] Circular stranded conductor

Packing : [D] Drum

No. of Cores and Cross Section	Nominal Thickness		Overall Diameter (approx)	Weight of Cable (approx)	Min. Insulation DC Resistance at 20°	Current Carrying Capacity at 30°C		Short Circuit Current Capacity at 1.0 second	Standard Delivery Length
	Insulation	Outer Sheath				In Ground	In Air		
sq.mm	mm	mm	mm	kg/km	M.Ohm.km	A	A	kA	m
7 x 2.5 re	0.8	1.8	19.7	848	10	26	21	0.29	1000/D
7 x 2.5 rm	0.8	1.8	20.6	918	9	26	21	0.29	1000/D
8 x 2.5 re	0.8	1.8	21	928	10	23	18	0.29	1000/D
8 x 2.5 rm	0.8	1.8	21.8	1007	9	23	18	0.29	1000/D
10 x 2.5 re	0.8	1.8	24	1228	10	21	17	0.29	1000/D
10 x 2.5 rm	0.8	1.8	25.2	1332	9	21	17	0.29	1000/D
12 x 2.5 re	0.8	1.8	24.6	1317	10	20	16	0.29	1000/D
12 x 2.5 rm	0.8	1.8	25.7	1431	9	20	16	0.29	1000/D
14 x 2.5 re	0.8	1.8	25.4	1421	10	18	15	0.29	1000/D
14 x 2.5 rm	0.8	1.8	26.7	1548	9	18	15	0.29	1000/D
16 x 2.5 re	0.8	1.8	26.9	1561	10	17	14	0.29	1000/D
16 x 2.5 rm	0.8	1.8	27.7	1671	9	17	14	0.29	1000/D
19 x 2.5 re	0.8	1.8	27.5	1675	10	17	13	0.29	1000/D
19 x 2.5 rm	0.8	1.8	28.9	1833	9	17	13	0.29	1000/D
21 x 2.5 re	0.8	1.8	28.6	1800	10	16	12	0.29	1000/D
21 x 2.5 rm	0.8	1.8	30.2	1973	9	16	12	0.29	1000/D
24 x 2.5 re	0.8	1.8	30.4	1980	10	15	11	0.29	1000/D
24 x 2.5 rm	0.8	1.8	31.9	2173	9	15	11	0.29	1000/D
30 x 2.5 re	0.8	1.9	32.5	2280	10	14	11	0.29	1000/D
30 x 2.5 rm	0.8	1.9	35.5	2823	9	14	11	0.29	1000/D
40 x 2.5 re	0.8	2.0	37.3	3167	10	14	11	0.29	1000/D
40 x 2.5 rm	0.8	2.0	39.5	3389	9	14	11	0.29	1000/D
52 x 2.5 re	0.8	2.1	41.6	3704	10	14	11	0.29	1000/D
52 x 2.5 rm	0.8	2.1	43.2	4002	9	14	11	0.29	1000/D
61 x 2.5 re	0.8	2.2	43.9	4121	10	14	11	0.29	1000/D
61 x 2.5 rm	0.8	2.2	46.3	4970	9	14	11	0.29	1000/D